

N-Ch 100V Fast Switching MOSFETs

- ★ Super Low Gate Charge
- ★ Green Device Available
- ★ Excellent Cdv/dt effect decline
- ★ Advanced high cell density Trench technology

Product Summary





BVDSS	RDS(on)	ID
100V	120mΩ	4A

Description

The UD4N10L is the highest performance trench N-ch MOSFETs with extreme high cell density, which provide excellent RDS(on) and gate charge for most of the synchronous buck converter applications.

The UD4N10L meet the RoHS and Green Product requirement, 100% EAS guaranteed with full function reliability approved.

SOT23-3L Pin Configuration



Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	100	V
V _{GS}	Gate-Source Voltage	±20	V
I _D @T _C =25°C	Continuous Drain Current, V _{GS} @ 10V ^{1,6}	4	A
I _D @T _C =100°C	Continuous Drain Current, V _{GS} @ 10V ^{1,6}	2	A
I _{DM}	Pulsed Drain Current ²	16	A
EAS	Single Pulse Avalanche Energy ³	12	mJ
I _{AS}	Avalanche Current	7	A
P _D @T _C =25°C	Total Power Dissipation ⁴	26.6	W
T _{STG}	Storage Temperature Range	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
R _{θJA}	Thermal Resistance Junction-Ambient ¹	---	---	°C/W
R _{θJC}	Thermal Resistance Junction-Case ¹	---	4.7	°C/W

N-Ch 100V Fast Switching MOSFETs

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=250\mu A$	100	---	---	V
$\Delta BV_{DSS} / \Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_D=1mA$	---	---	---	$V/^\circ\text{C}$
$R_{DS(on)}$	Static Drain-Source On-Resistance ²	$V_{GS}=10V$, $I_D=2A$	---	120	156	$m\Omega$
		$V_{GS}=4.5V$, $I_D=1.2A$	---	126	164	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=250\mu A$	1	2	2.5	V
$\Delta V_{GS(th)}$	$V_{GS(th)}$ Temperature Coefficient		---	---	---	$mV/^\circ\text{C}$
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=100V$, $V_{GS}=0V$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{DS}=100V$, $V_{GS}=0V$, $T_J=100^\circ\text{C}$	---	---	---	
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V$, $V_{DS}=0V$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{DS}=50V$, $I_D=0.8A$	---	---	---	S
R_g	Gate Resistance	$V_{DS}=0V$, $V_{GS}=0V$, $f=1MHz$	---	---	---	Ω
Q_g	Total Gate Charge	$V_{DS}=50V$, $V_{GS}=0$ to $10V$, $I_D=1.2A$	---	14.8	---	nC
Q_{gs}	Gate-Source Charge		---	3	---	
Q_{gd}	Gate-Drain Charge		---	4.4	---	
$T_{d(on)}$	Turn-On Delay Time	$V_{GS}=10V$, $V_{DD}=50V$, $R_G=3\Omega$, $I_D=1.2A$	---	12	---	ns
T_r	Rise Time		---	7.6	---	
$T_{d(off)}$	Turn-Off Delay Time		---	36	---	
T_f	Fall Time		---	9.2	---	
C_{iss}	Input Capacitance	$V_{DS}=25V$, $V_{GS}=0V$, $f=1MHz$	---	655	---	pF
C_{oss}	Output Capacitance		---	31	---	
C_{rss}	Reverse Transfer Capacitance		---	24	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current ^{1,5}	$V_G=V_D=0V$, Force Current	---	---	4	A
V_{SD}	Diode Forward Voltage ²	$V_{GS}=0V$, $I_S=4A$, $T_J=25^\circ\text{C}$	---	---	1.2	V

Note :

1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature.
2. EAS condition: Starting $T_J=25^\circ\text{C}$, $V_{DD}=50V$, $V_G=10V$, $R_G=25\Omega$, $L=0.5mH$, $I_{AS}=7A$
3. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 0.5\%$.

Typical Characteristics

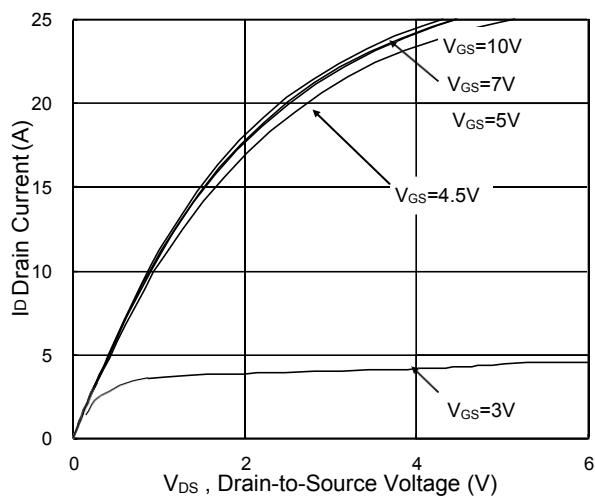


Fig.1 Typical Output Characteristics

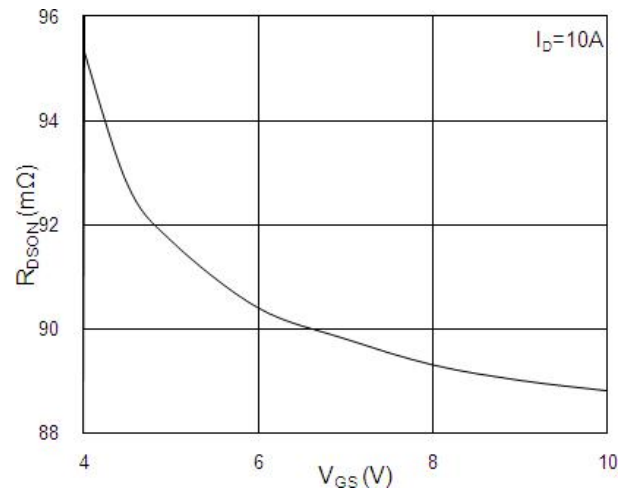


Fig.2 On-Resistance vs. Gate-Source

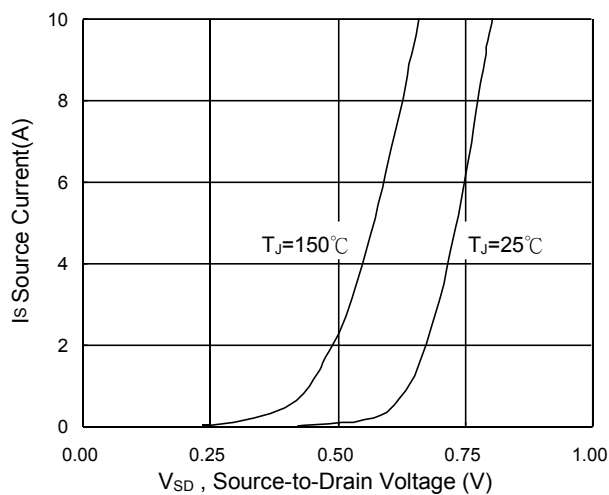


Fig.3 Forward Characteristics Of Reverse

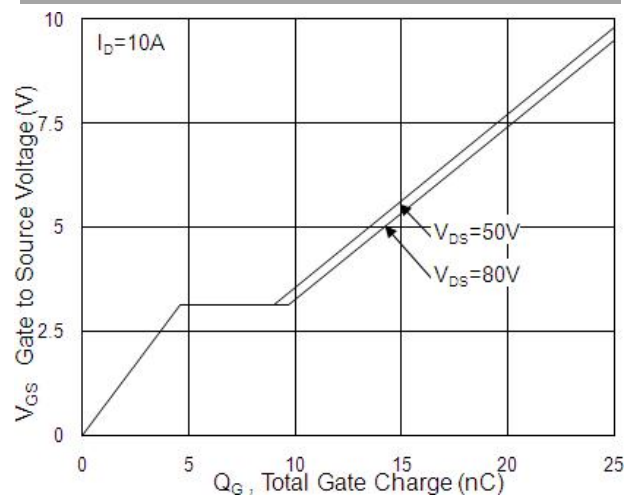


Fig.4 Gate-Charge Characteristics

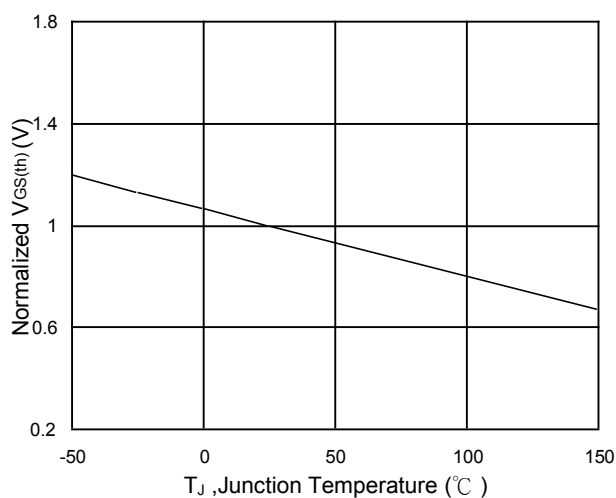


Fig.5 Normalized $V_{GS(th)}$ vs. T_J

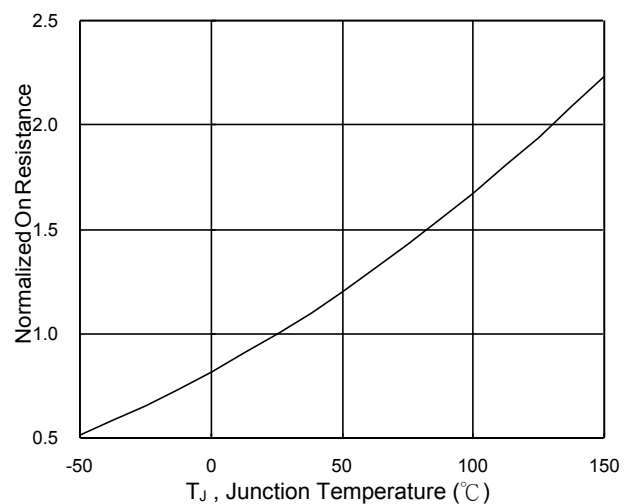


Fig.6 Normalized $R_{DS(on)}$ vs. T_J

N-Ch 100V Fast Switching MOSFETs

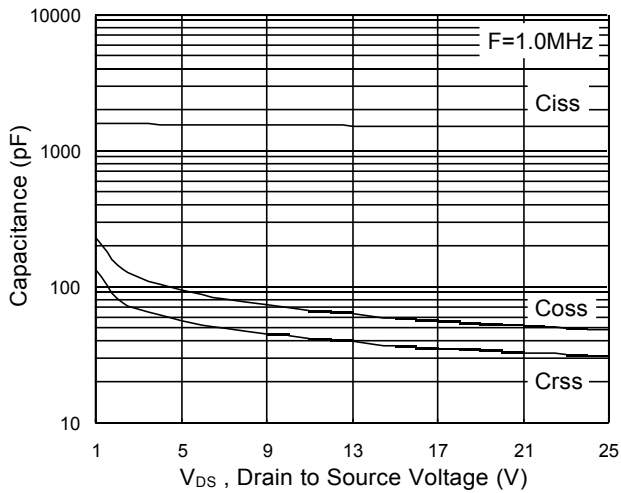


Fig.7 Capacitance

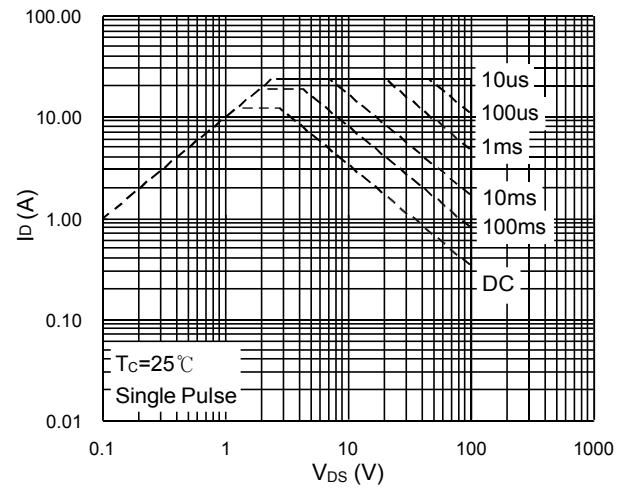


Fig.8 Safe Operating Area

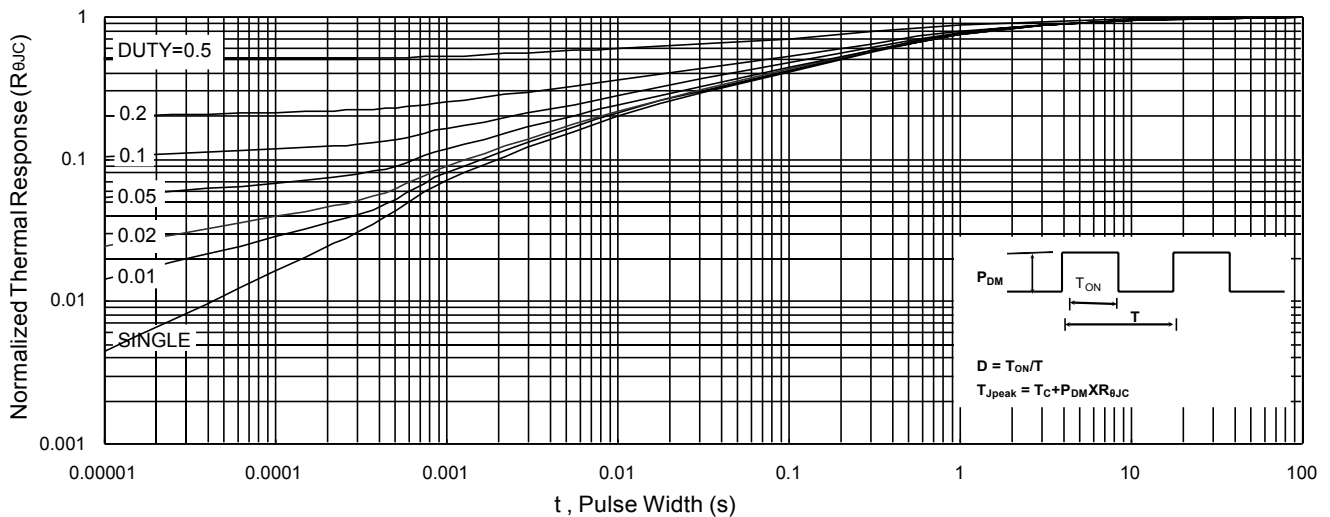


Fig.9 Normalized Maximum Transient Thermal Impedance

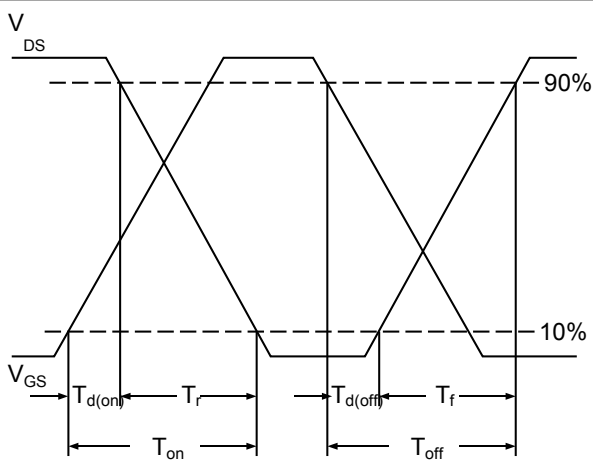


Fig.10 Switching Time Waveform


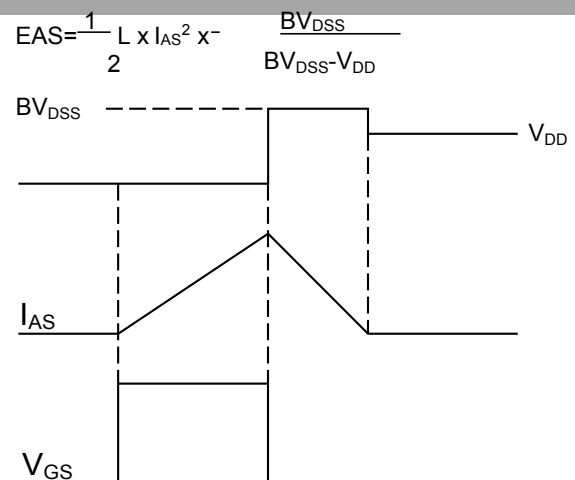


Fig.11 Unclamped Inductive Switching Waveform

SOT23-3L Package Information

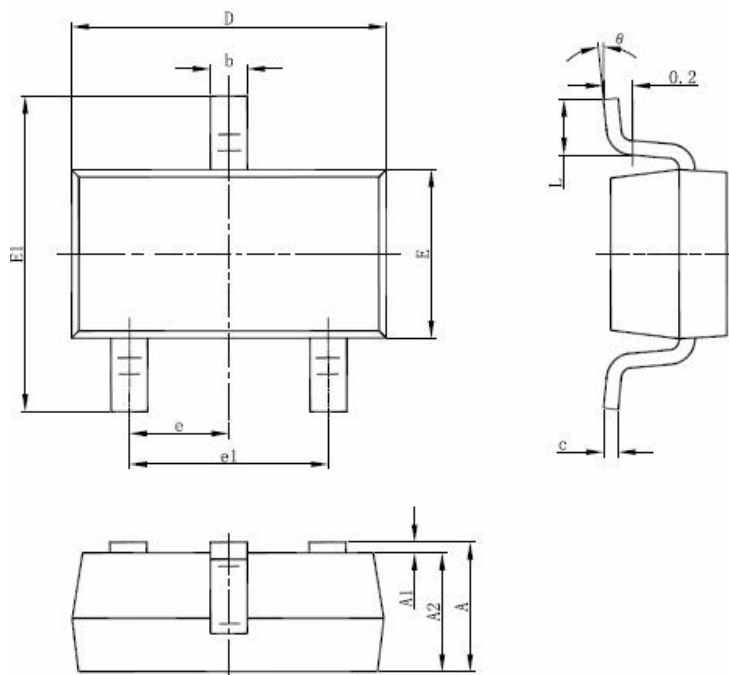

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°