

- ★ Super Low Gate Charge
- ★ 100% EAS Guaranteed
- ★ Green Device Available
- ★ Excellent CdV/dt effect decline
- ★ Advanced high cell density Trench technology

Product Summary





BVDSS	RDSON	ID
60V	6.8mΩ	65A

Description

The UD65N06 is the high cell density trenched N-ch MOSFETs, which provide excellent RDSON and gate charge for most of the synchronous buck converter applications.

The UD65N06 meet the RoHS and Green Product requirement 100% EAS guaranteed with full function reliability approved.

TO252-3L Pin Configuration



Absolute Maximum Ratings (TA=25°C)

Symbol	Parameter	Value	Unit
V_{DS}	Drain-Source Voltage ($V_{GS}=0V$)	60	V
V_{GS}	Gate-Source Voltage ($V_{DS}=0V$)	±20	V
$I_{D(DC)}$	Drain Current (DC) at $T_c=25^\circ C$	65	A
$I_{D(DC)}$	Drain Current (DC) at $T_c=100^\circ C$	45	A
$I_{DM(pluse)}$	Drain Current-Continuous@ Current-Pulsed (Note 1)	260	A
dv/dt	Peak Diode Recovery Voltage	8	V/ns
P_D	Maximum Power Dissipation($T_c=25^\circ C$)	75	W
	Derating Factor	0.5	W/°C
E_{AS}	Single Pulse Avalanche Energy (Note 2)	300	mJ
T_J, T_{STG}	Operating Junction and Storage Temperature Range	-55 To 175	°C

Notes 1.Repetitive Rating: Pulse width limited by maximum junction temperature

2.EAS condition: $T_J=25^\circ C, V_{DD}=33V, V_G=10V$

Thermal Characteristic

Symbol	Parameter	Value	Max	Unit
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	---	2.0	$^{\circ}C/W$

Electrical Characteristics ($T_A=25^{\circ}C$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
On/Off States						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V I _D =250μA	60	---	---	V
I _{DSS}	Zero Gate Voltage Drain Current(Tc=25℃)	V _{DS} =64V,V _{GS} =0V	---	---	1	μA
I _{DSS}	Zero Gate Voltage Drain Current(Tc=125℃)	V _{DS} =64V,V _{GS} =0V	---	---	10	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V,V _{DS} =0V	---	---	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} ,I _D =250μA	2	---	4	V
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =40A	---	6.8	8.2	mΩ
Dynamic Characteristics						
g _{FS}	Forward Transconductance	V _{DS} =10V,I _D =15A	15	---	---	S
C _{iss}	Input Capacitance	V _{DS} =25V,V _{GS} =0V, f=1.0MHz	---	2873	---	pF
C _{oss}	Output Capacitance		---	252	---	pF
C _{rss}	Reverse Transfer Capacitance		---	205	---	pF
Q _g	Total Gate Charge	V _{DS} =50V,I _D =40A, V _{GS} =10V	---	56	---	nC
Q _{gs}	Gate-Source Charge		---	10	---	nC
Q _{gd}	Gate-Drain Charge		---	16	---	nC
Switching Times						
t _{d(on)}	Turn-on Delay Time	V _{DD} =30V,I _D =2A,R _L =15Ω V _{GS} =10V,R _G =2.5Ω	---	14.5	---	nS
t _r	Turn-on Rise Time		---	24	---	nS
t _{d(off)}	Turn-Off Delay Time		---	45	---	nS
t _f	Turn-Off Fall Time		---	22	---	nS
Source-Drain Diode Characteristics						
I _{SD}	Source-Drain Current(Body Diode)		---	65	---	A
I _{SDM}	Pulsed Source-Drain Current(Body Diode)		---	260	---	A
V _{SD}	Forward On Voltage ^(Note 1)	T _J =25℃,I _{SD} =40A,V _{GS} =0V	---	0.89	0.99	V
t _{rr}	Reverse Recovery Time ^(Note 1)	T _J =25℃,I _F =75A di/dt=100A/μs	---	22	---	nS
Q _{rr}	Reverse Recovery Charge ^(Note 1)		---	27	---	nC
t _{on}	Forward Turn-on Time	Intrinsic turn-on time is negligible(turn-on is dominated by L _S +L _D)				

Notes 1. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 1.5\%$, $R_G=25\Omega$, Starting $T_J=25^{\circ}C$

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS (Curves)

Figure1. Output Characteristics

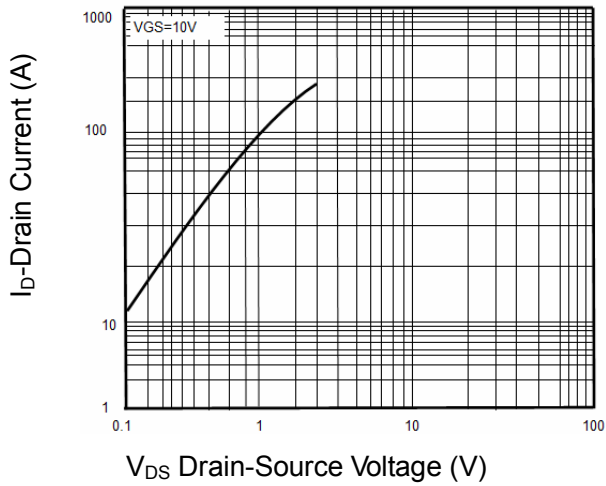


Figure2. Transfer Characteristics

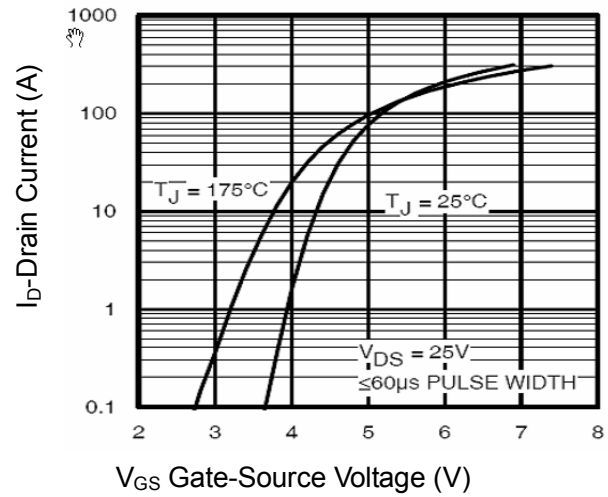


Figure3. BVDSS vs Junction Temperature

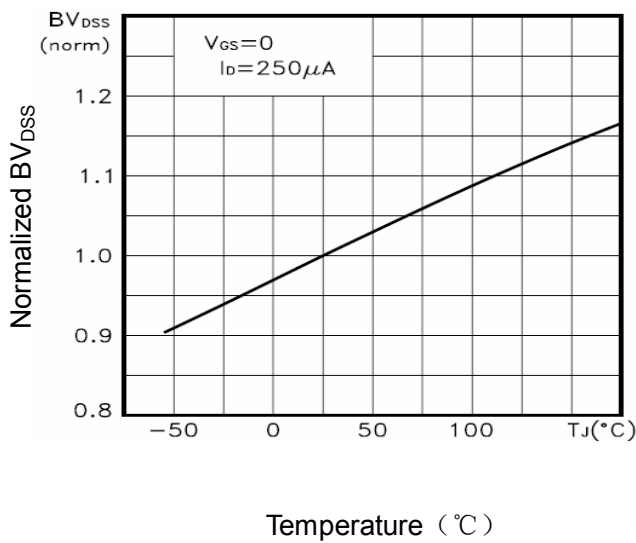


Figure4. ID vs Junction Temperature

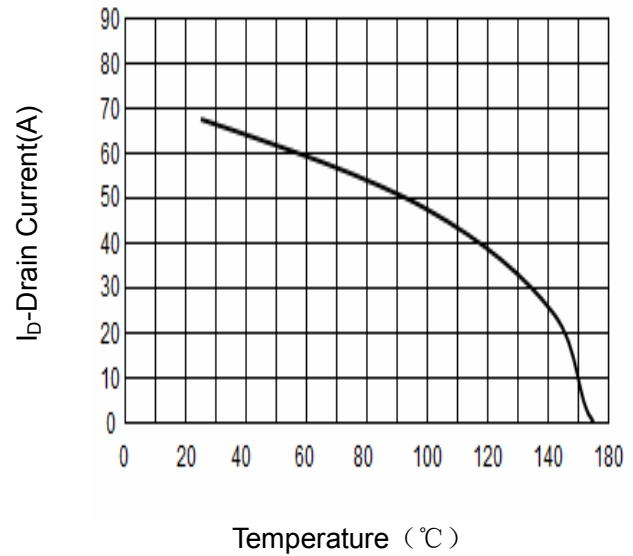


Figure5. VGS(th) vs Junction Temperature


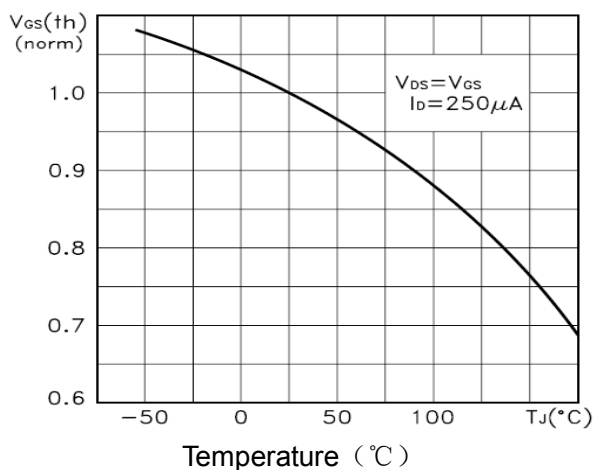


Figure6. Rdson Vs Junction Temperature

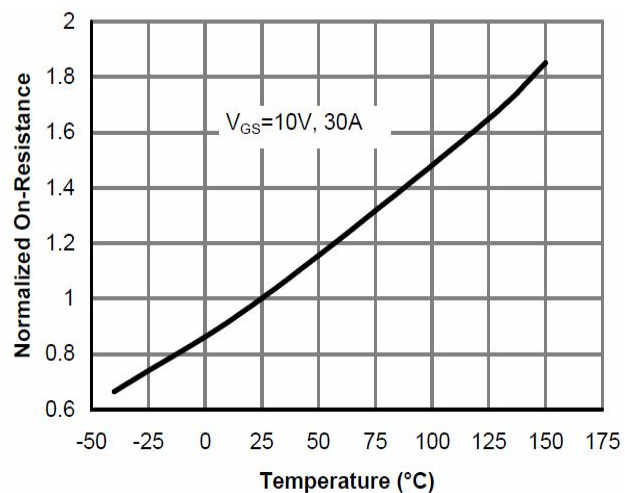

N-Ch 60V Fast Switching MOSFETs

Figure7. Gate Charge

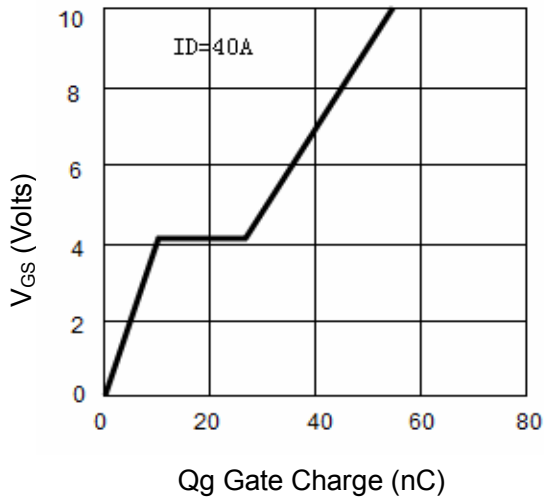


Figure8. Capacitance vs Vds

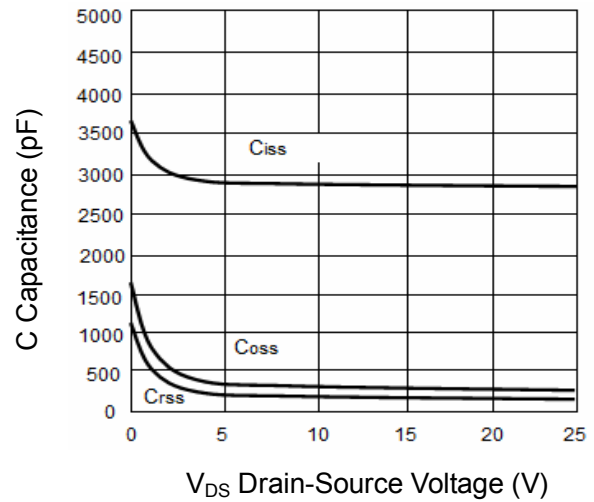


Figure9. Source- Drain Diode Forward

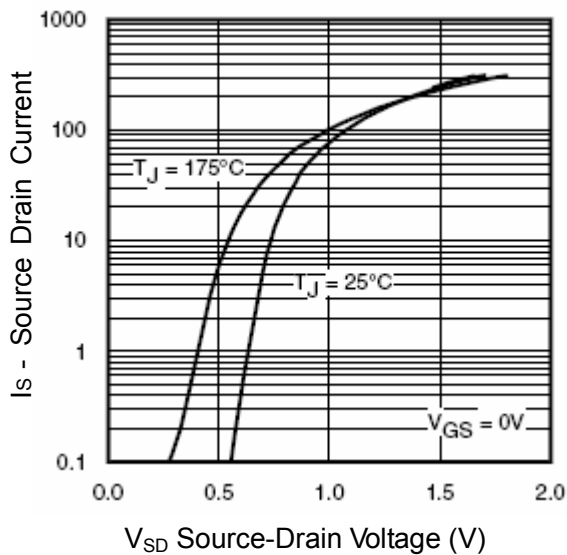


Figure10. Safe Operation Area






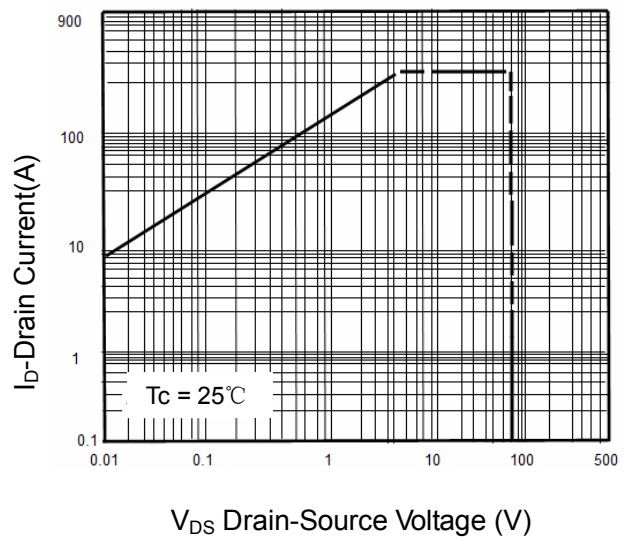


Figure11. Normalized Maximum Transient Thermal Impedance

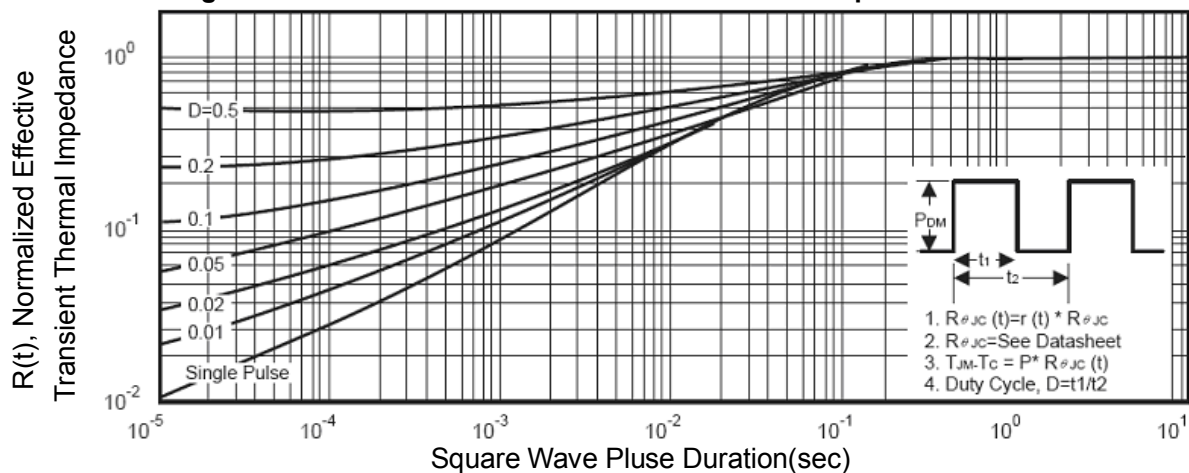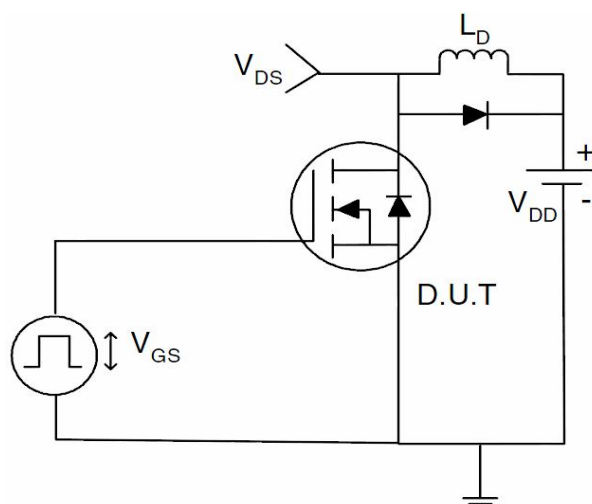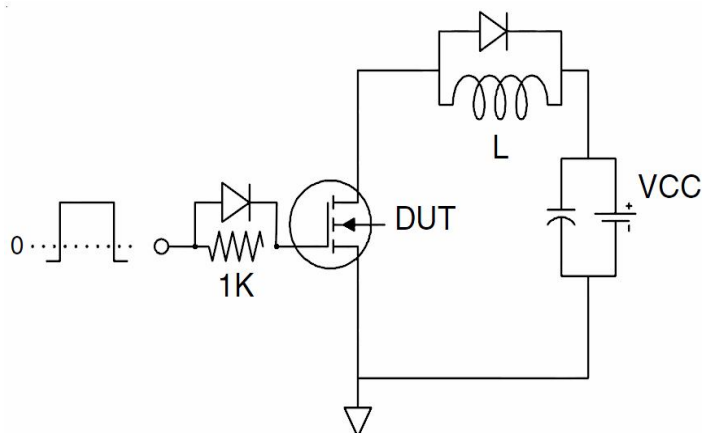

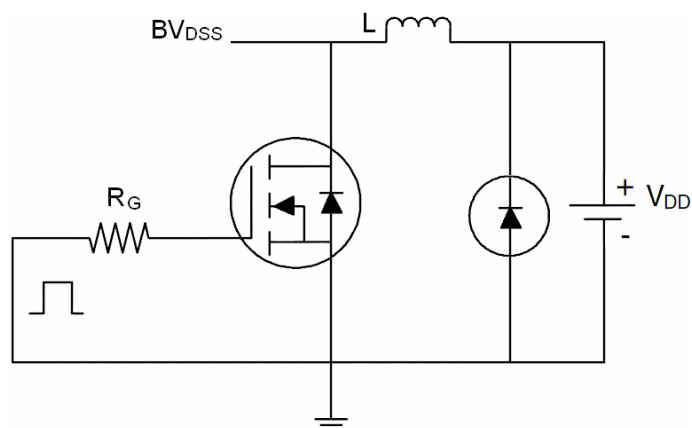


Package Mechanical Data-TO252-3L

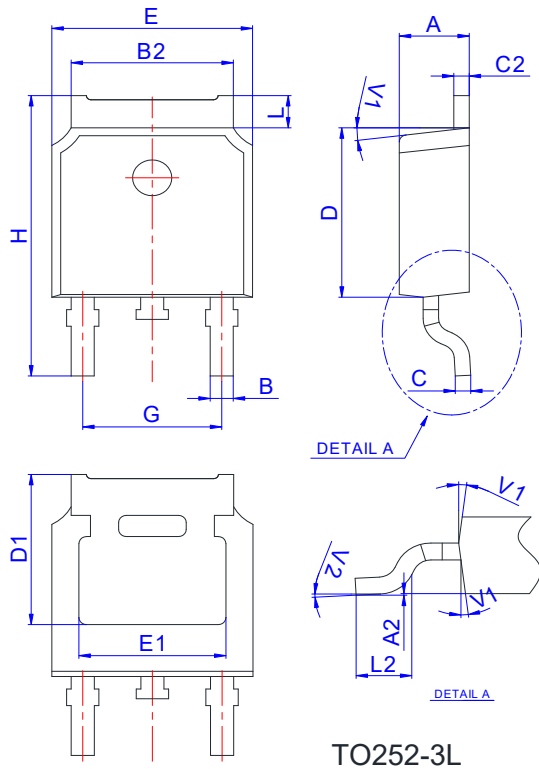

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.10		2.50	0.083		0.098
A2	0		0.10	0		0.004
B	0.66		0.86	0.026		0.034
B2	5.18		5.48	0.202		0.216
C	0.40		0.60	0.016		0.024
C2	0.44		0.58	0.017		0.023
D	5.90		6.30	0.232		0.248
D1	5.30REF			0.209REF		
E	6.40		6.80	0.252		0.268
E1	4.63			0.182		
G	4.47		4.67	0.176		0.184
H	9.50		10.70	0.374		0.421
L	1.09		1.21	0.043		0.048
L2	1.35		1.65	0.053		0.065
V1		7°			7°	
V2	0°		6°	0°		6°

Reel Specification-TO252-3L

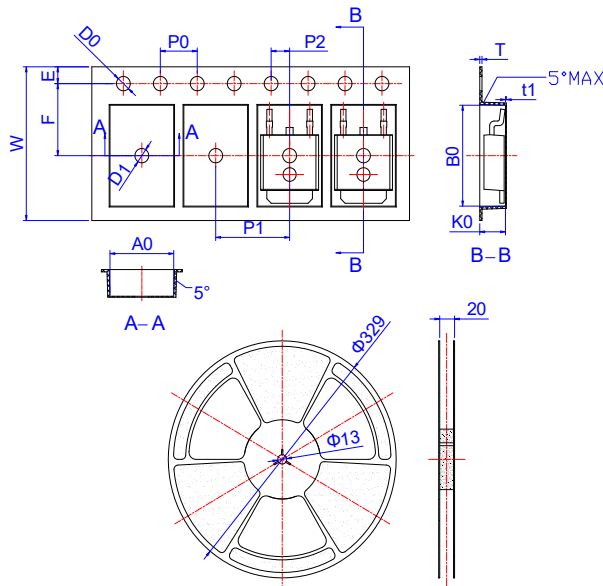

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
W	15.90	16.00	16.10	0.626	0.630	0.634
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
D0	1.40	1.50	1.60	0.055	0.059	0.063
D1	1.40	1.50	1.60	0.055	0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.90	2.00	2.10	0.075	0.079	0.083
A0	6.85	6.90	7.00	0.270	0.271	0.276
B0	10.45	10.50	10.60	0.411	0.413	0.417
K0	2.68	2.78	2.88	0.105	0.109	0.113
T	0.24		0.27	0.009		0.011
t1	0.10			0.004		
10P0	39.80	40.00	40.20	1.567	1.575	1.583